



DOSATRON®

An Ingersoll Rand Business



Certified to
NSF/ANSI/CAN 61&372



D40WL3000NIEAF - 40 GPM INTERACTIVE SCHEMATICS

UNIT SPECIFICATIONS


- 1:3000 - 1:800
- 5 - 116 PSI
- 1 1/2" NPT Connection

SUGGESTED INSTALLATION

- 200 mesh/80 micron water filter prior to the unit
-

DOCUMENT INSTRUCTIONS

- Click on a part #, to visit item page
- Click arrow back from item page, to return to this document

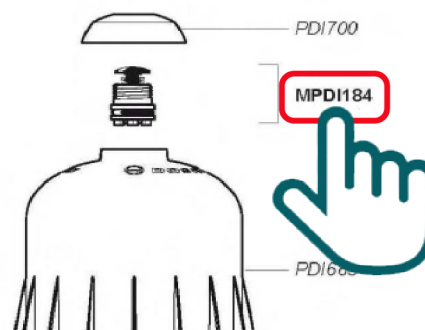


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

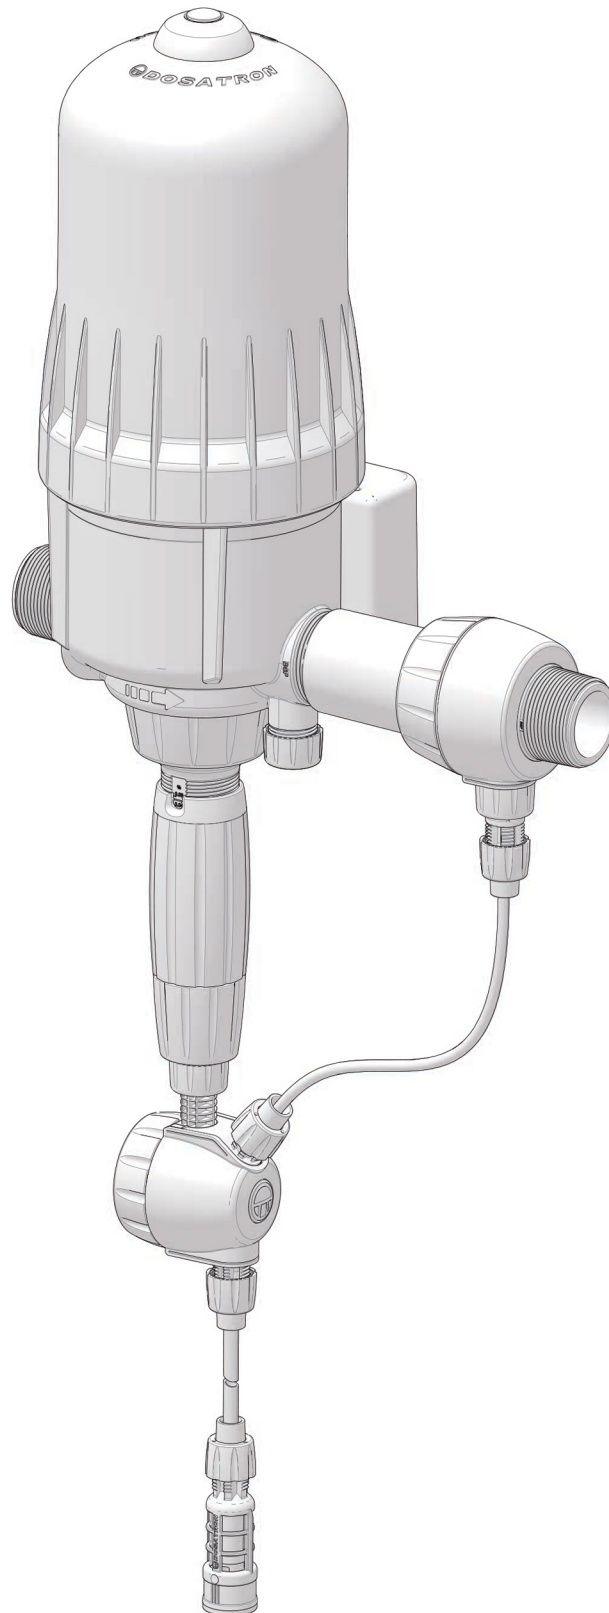


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%


0.35 - 8 bar

5 - 116 psi

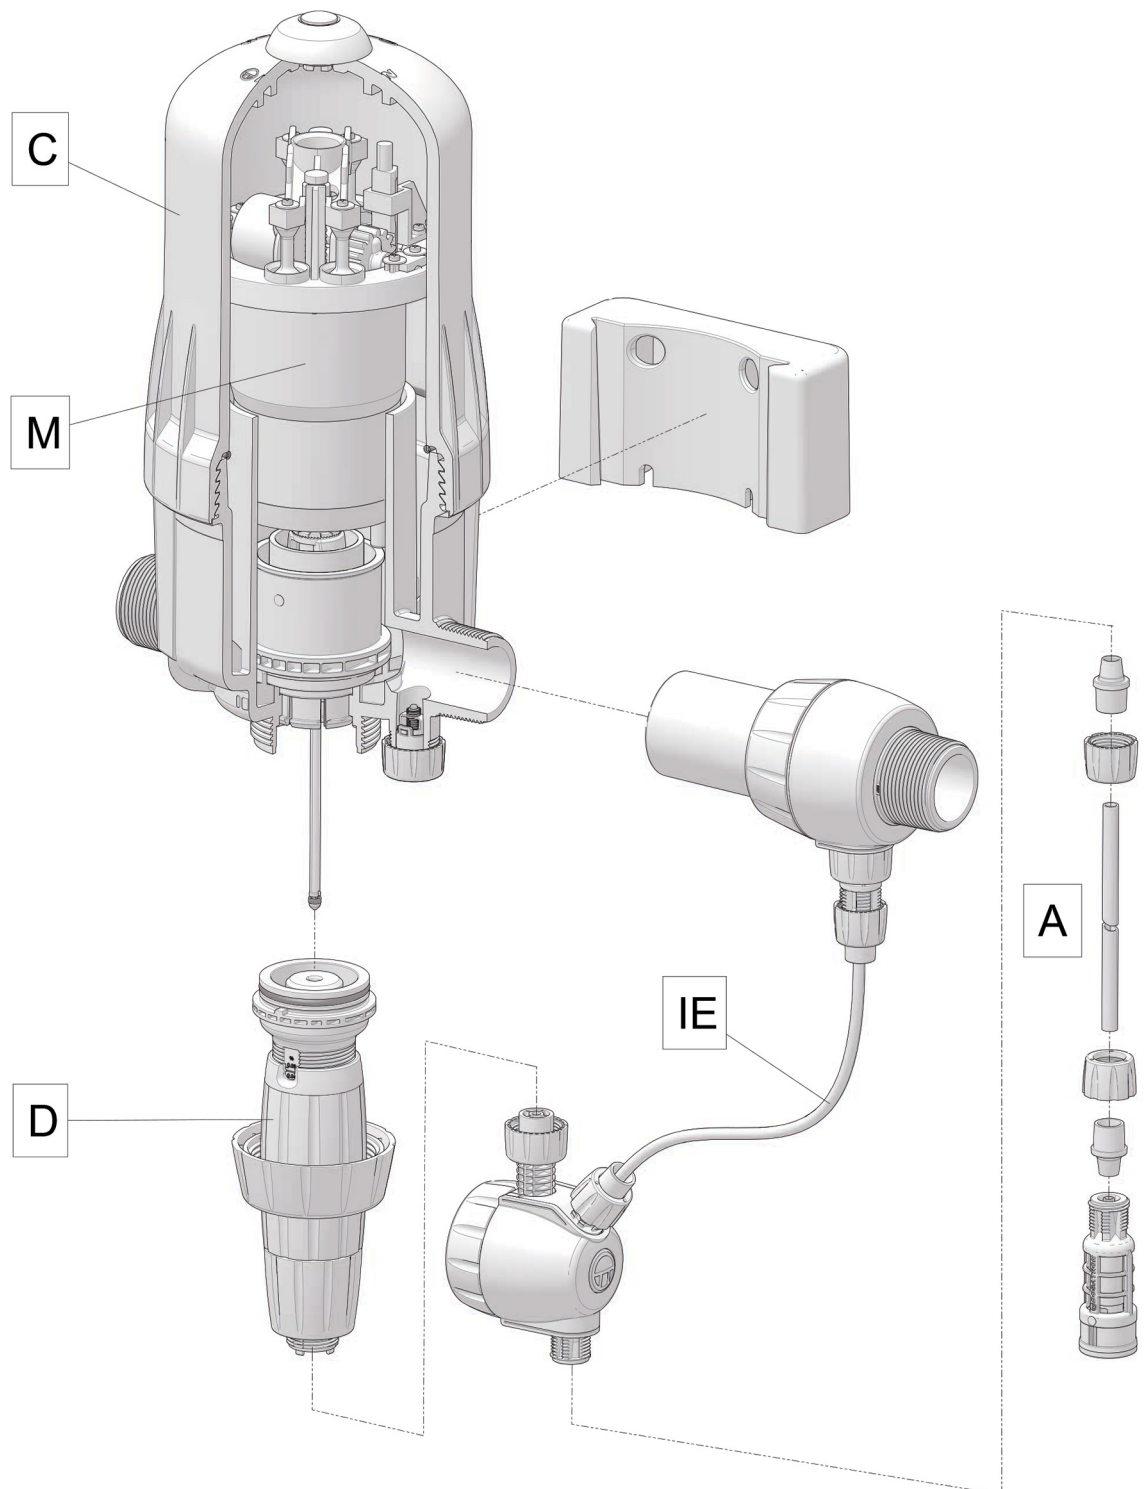

D40WL3000NIEAF

40 GPM - 1:3000 - 1:800
 $8 \text{ m}^3/\text{h}$ - 0.03 - 0.125%
 0.35 - 8 bar
 5 - 116 psi

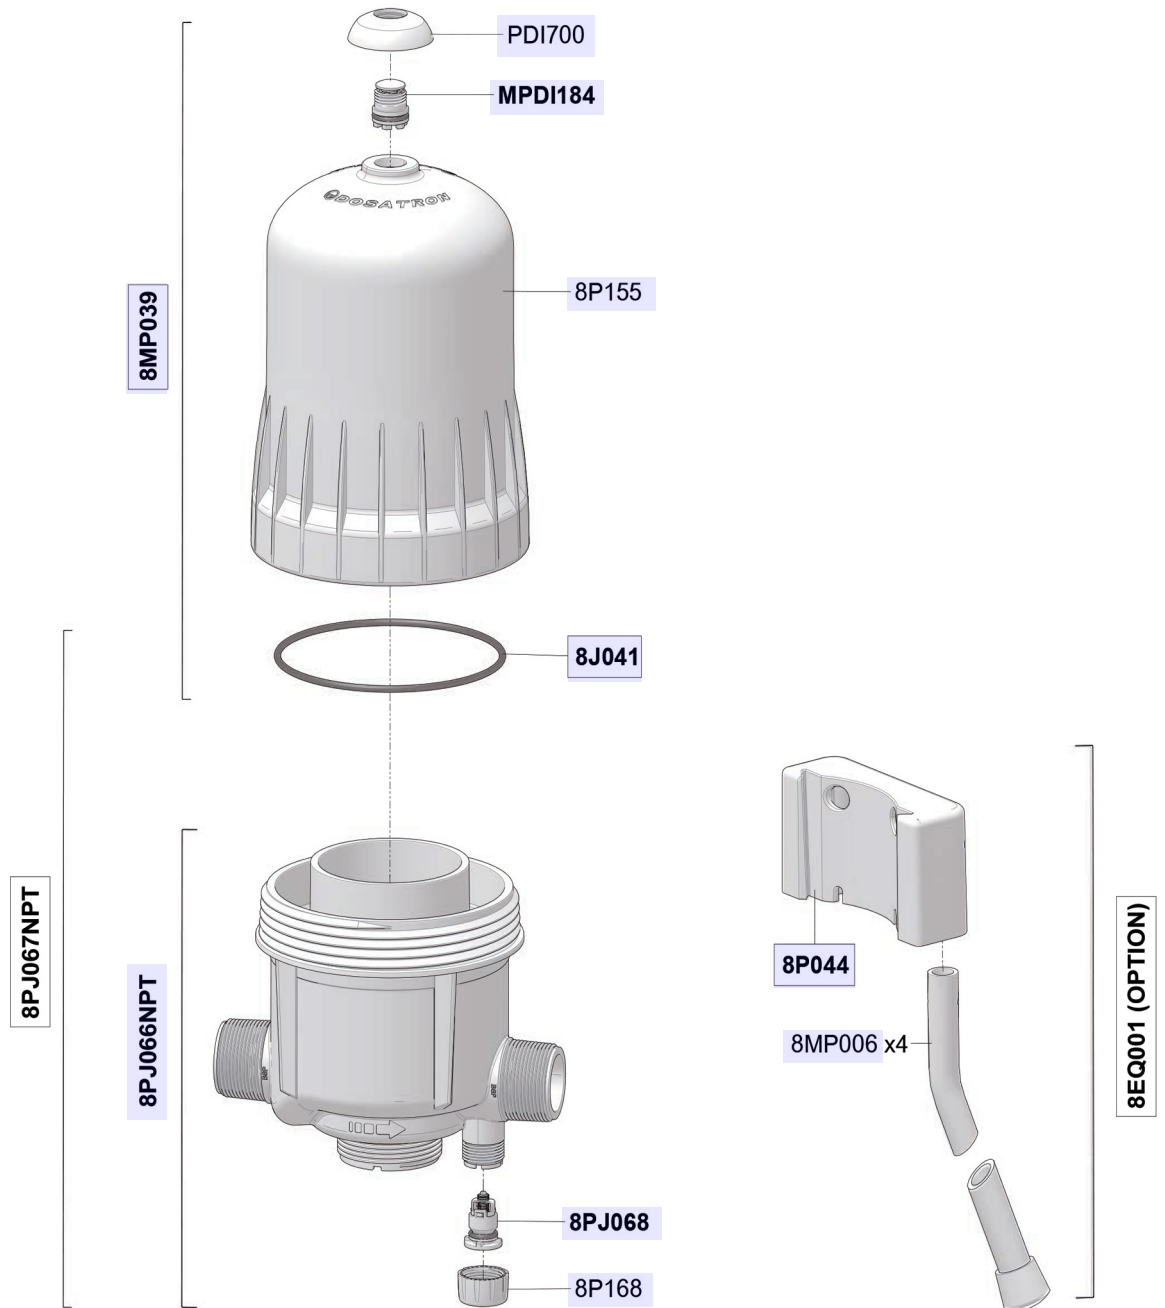

C


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

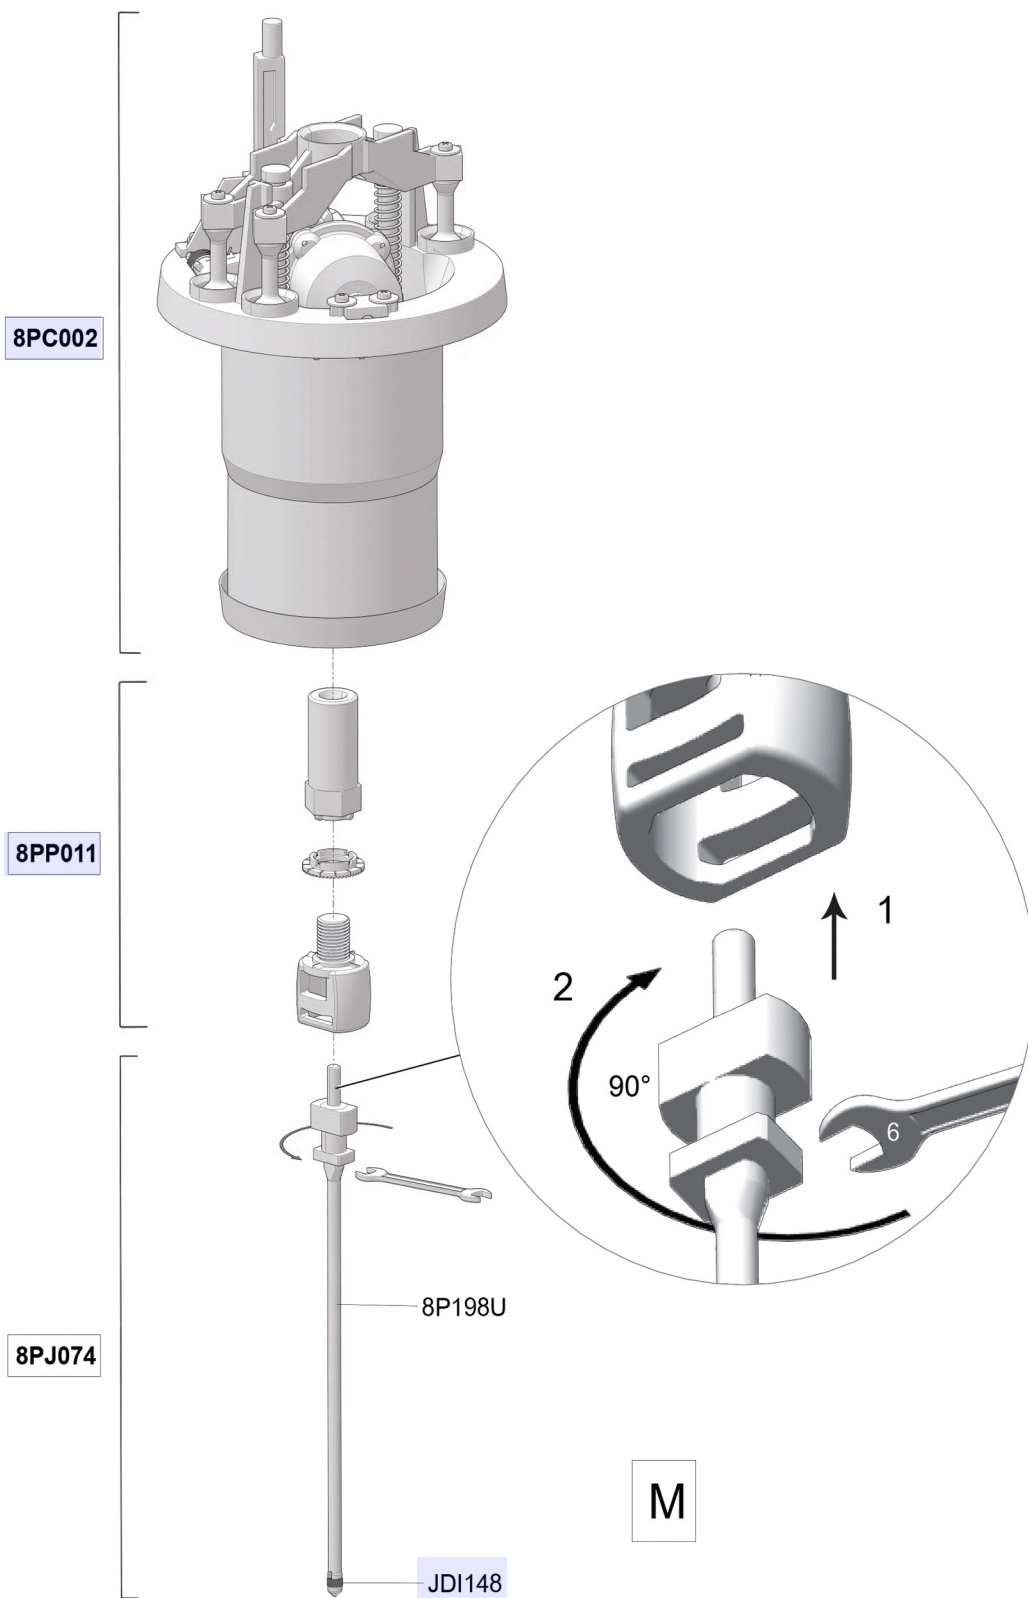


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

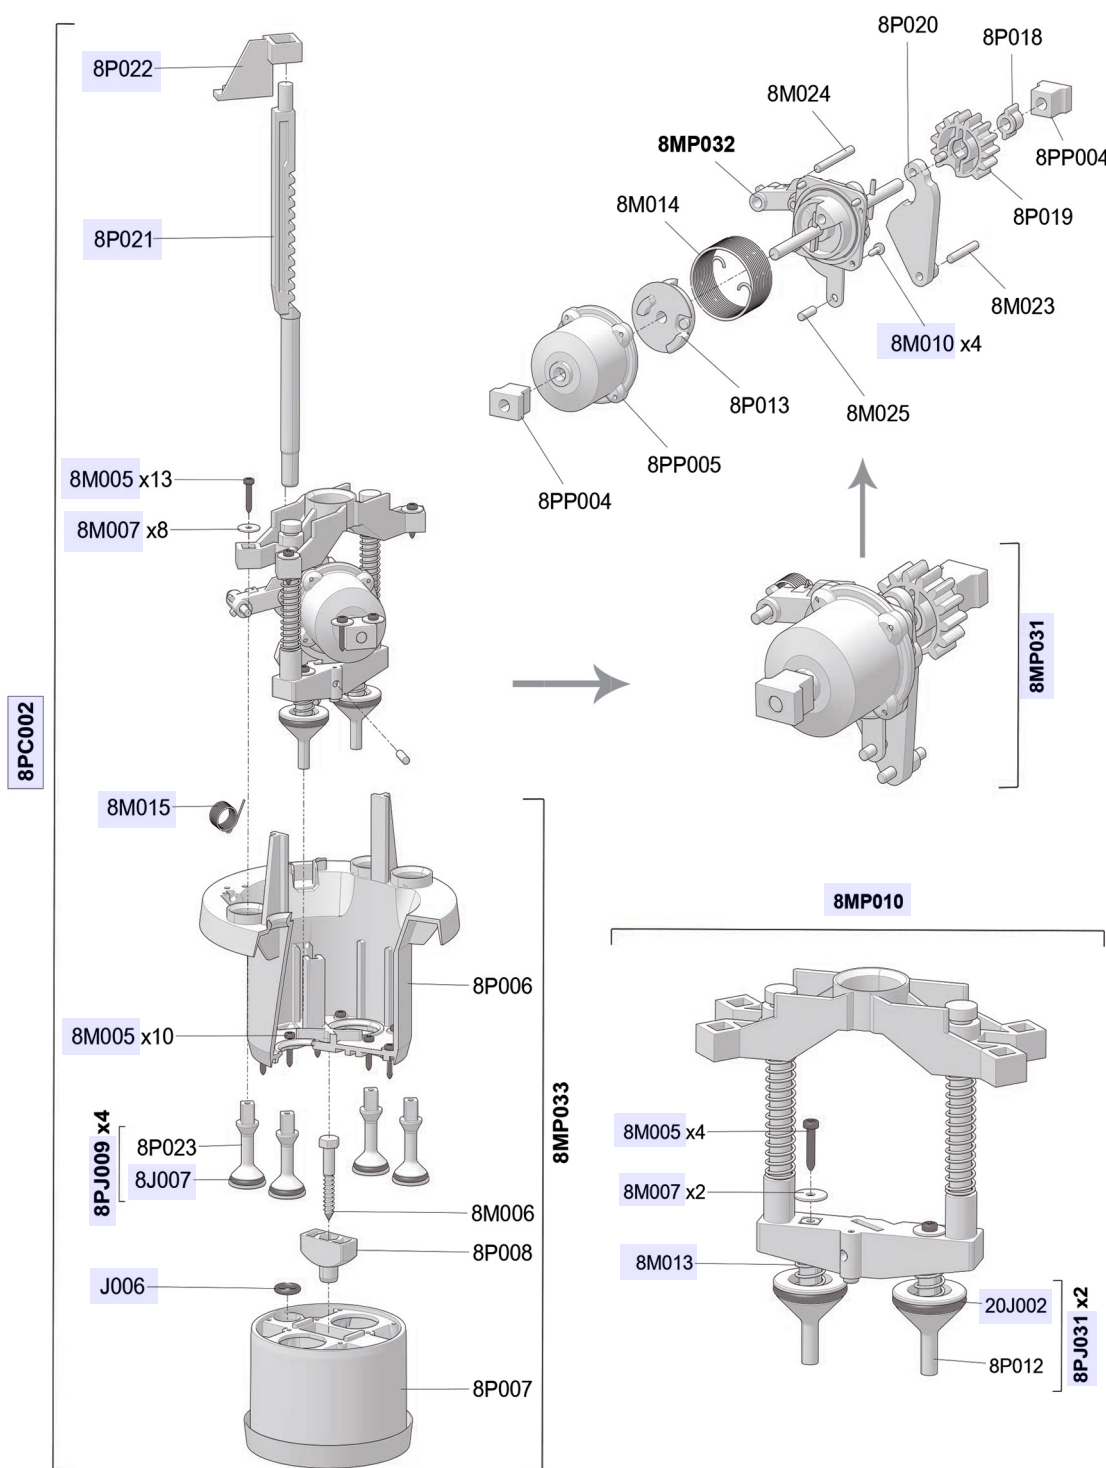

M


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

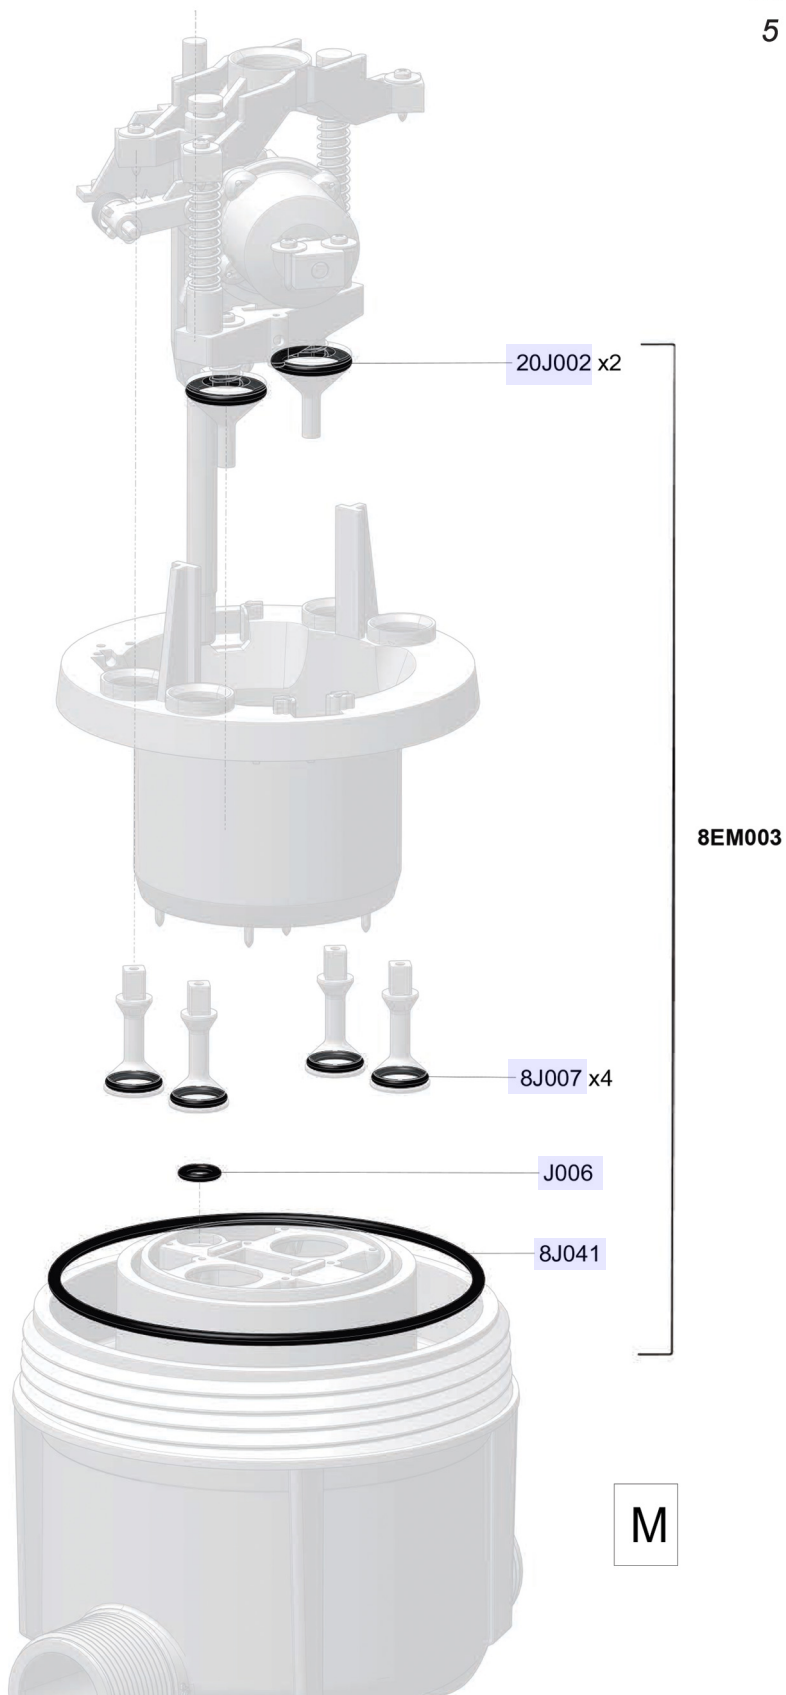


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

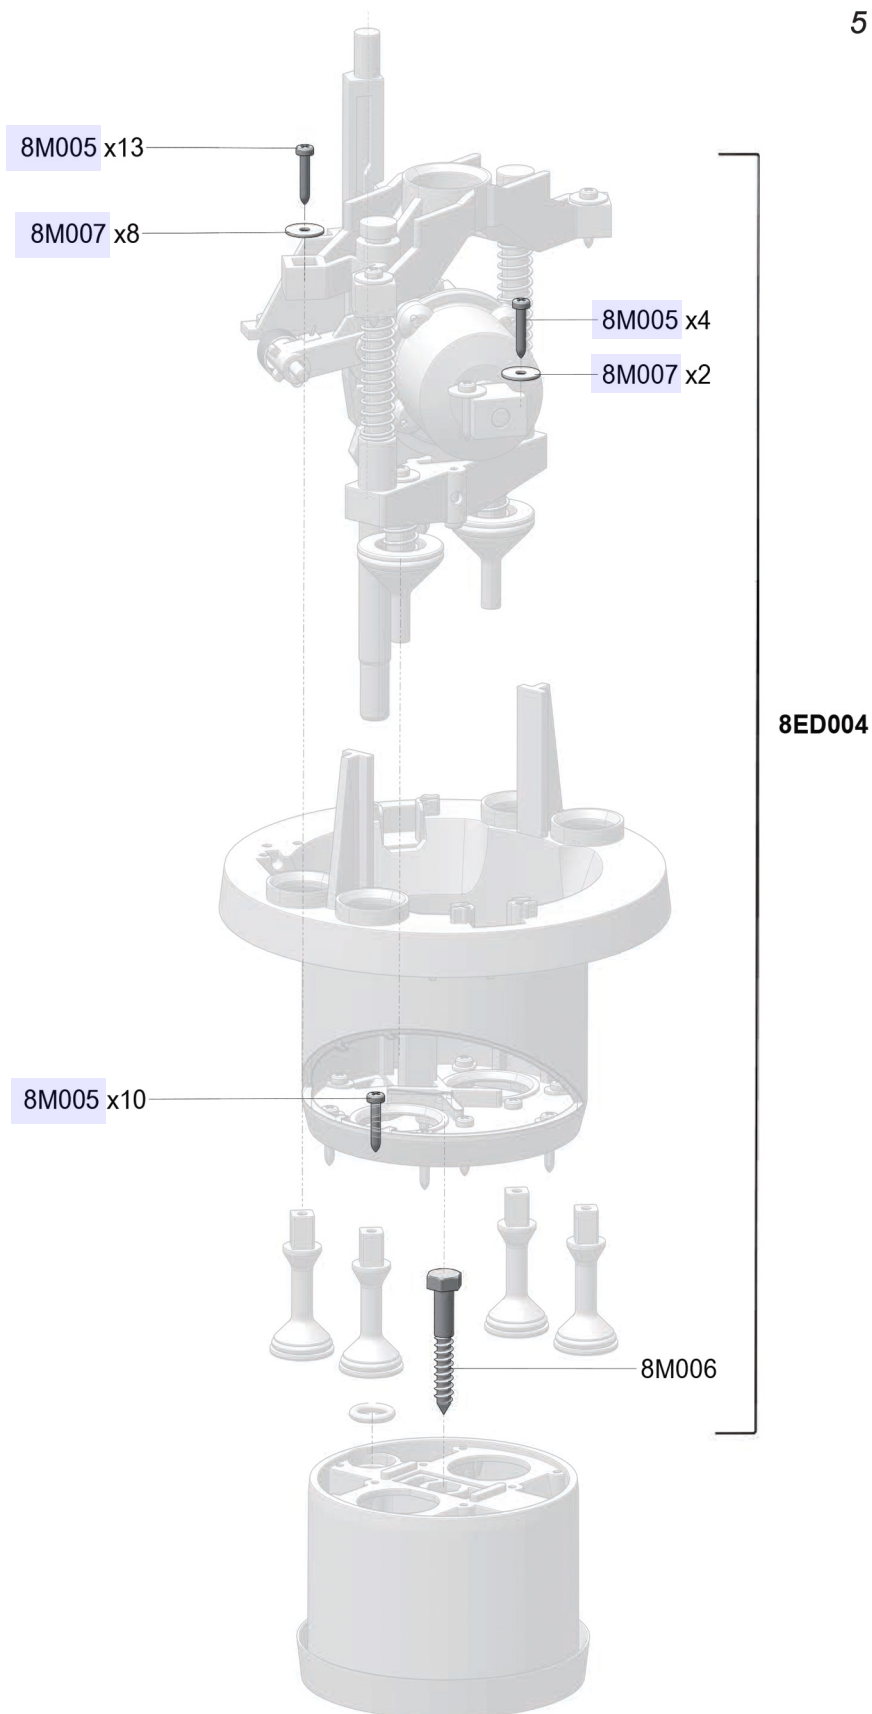


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

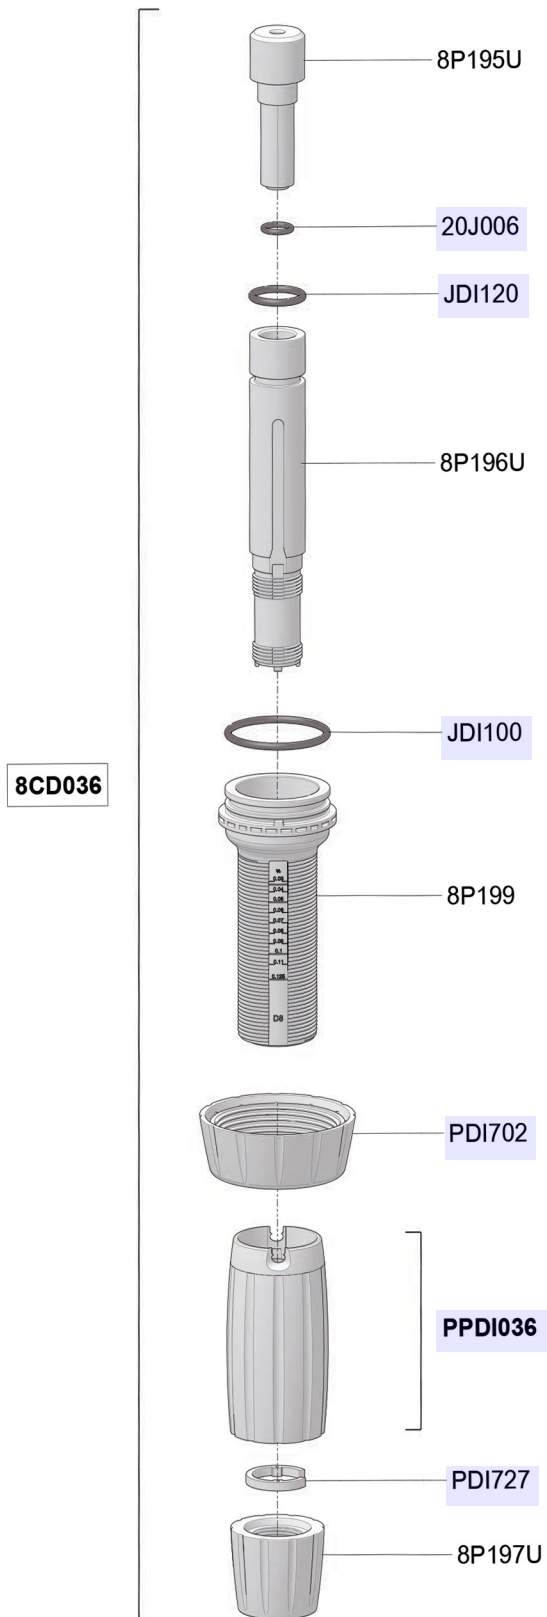

D


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

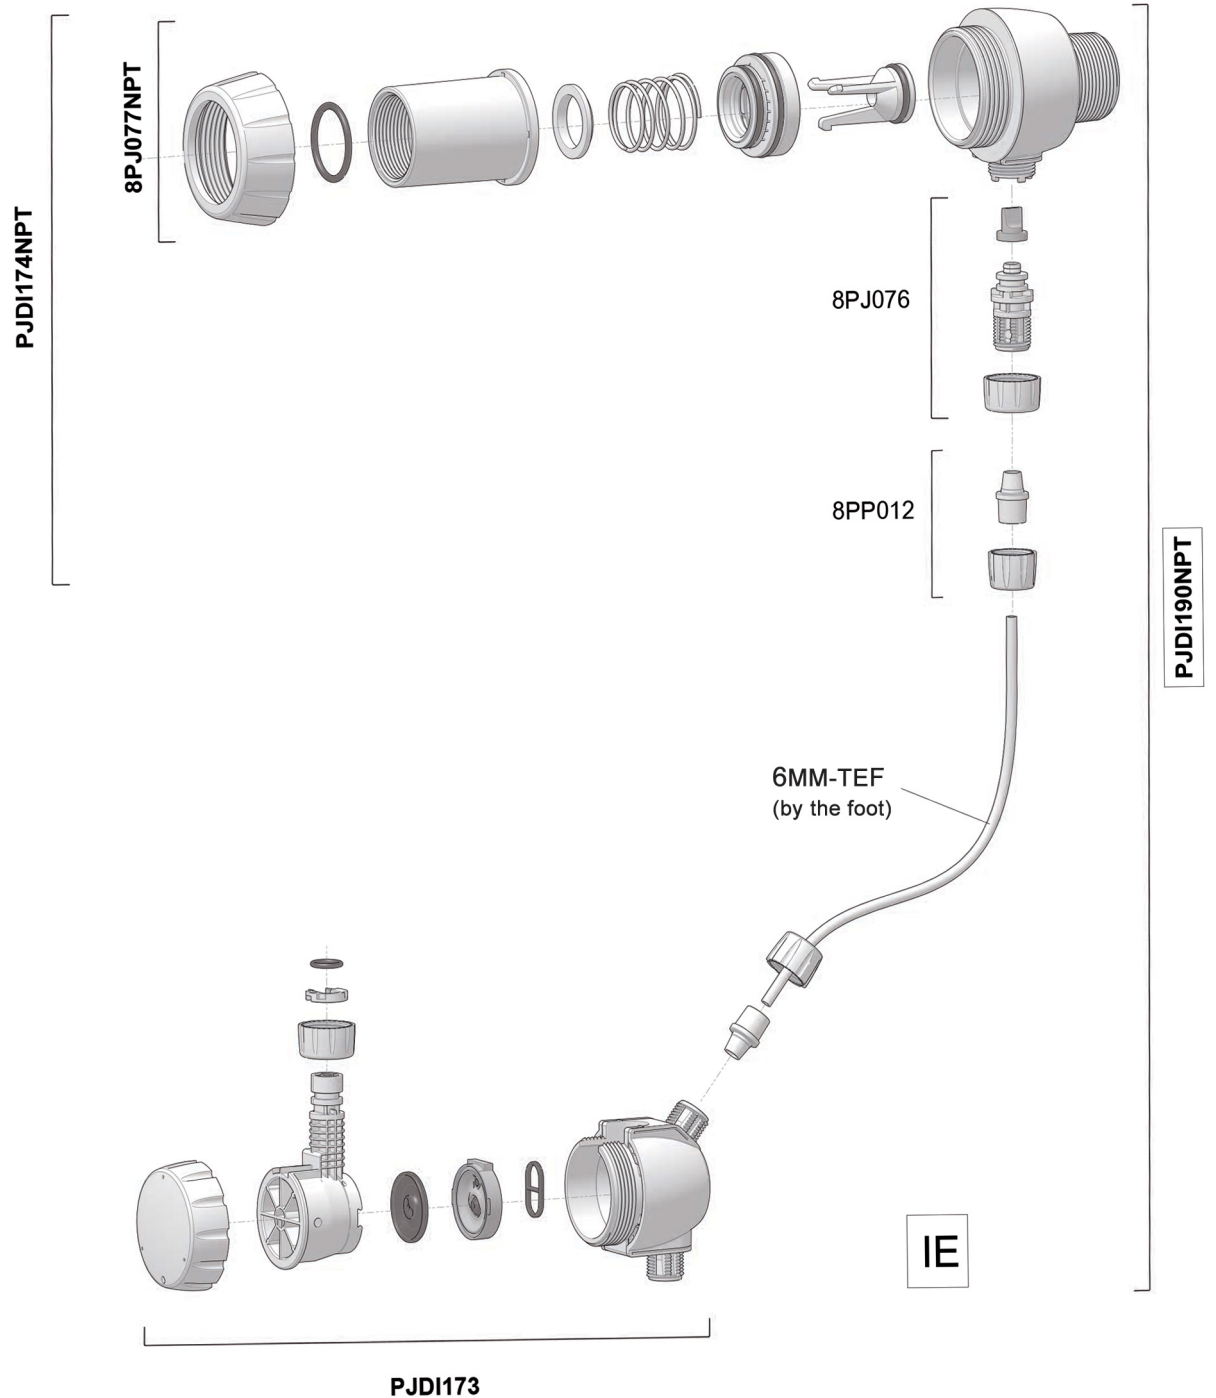


D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

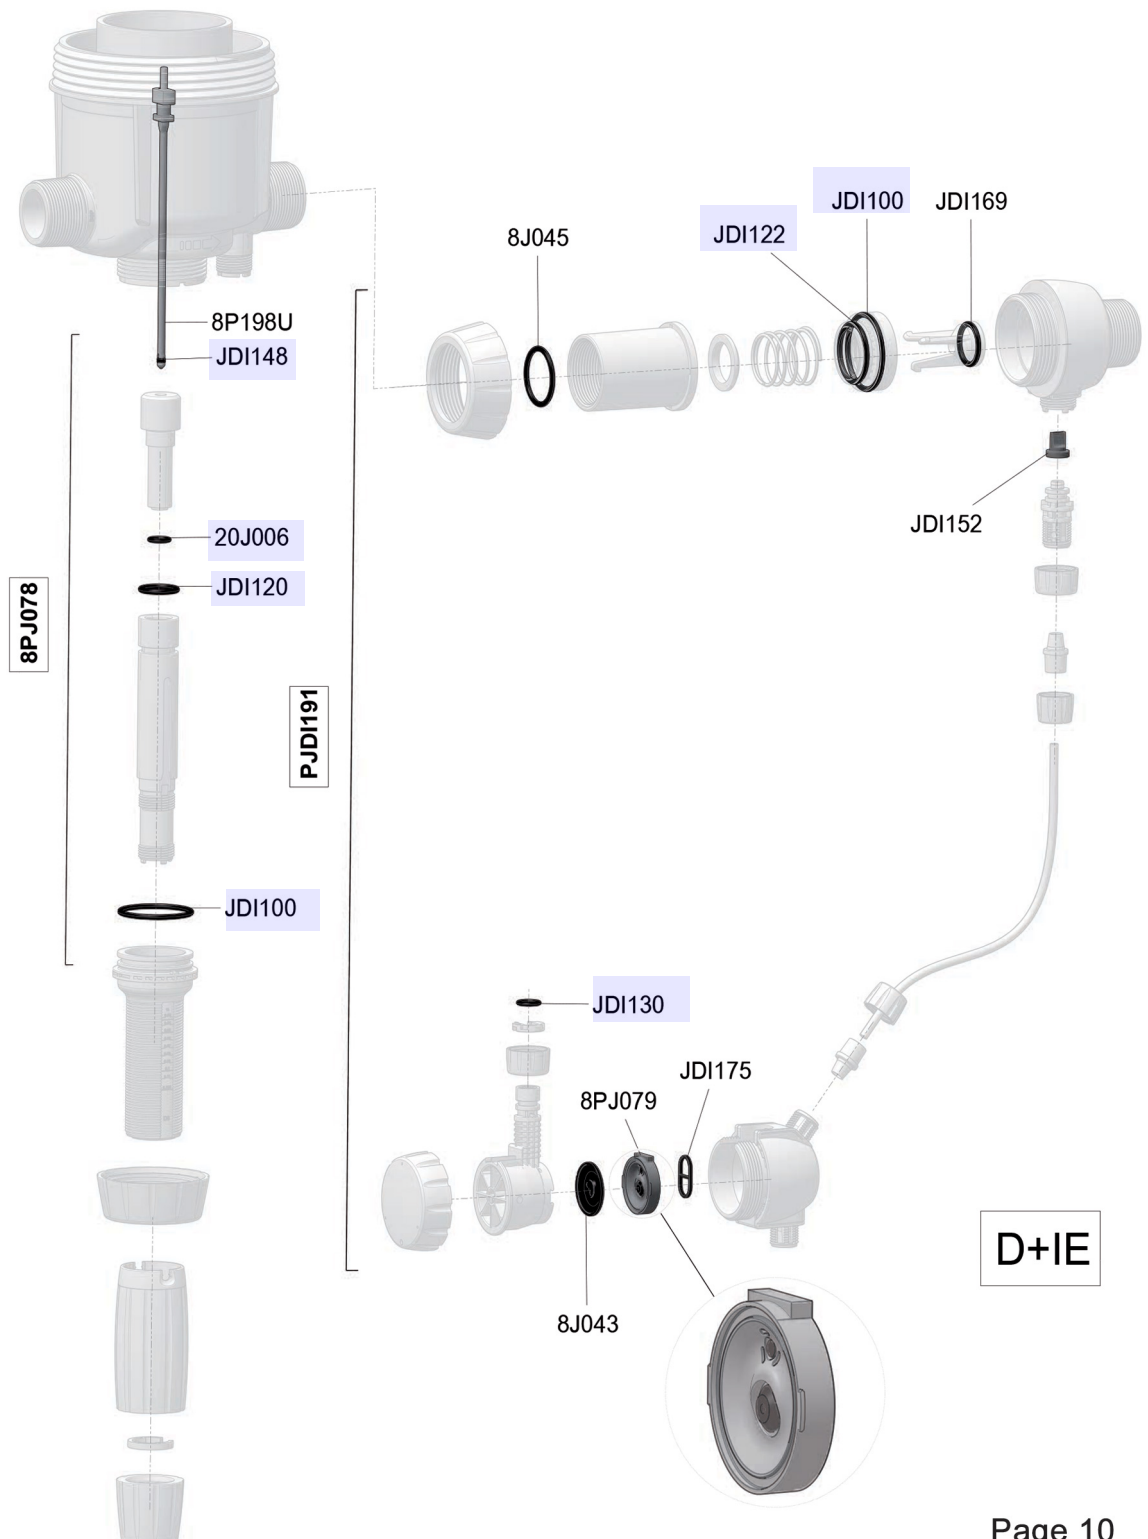

D40WL3000NIEAF

40 GPM - 1:3000 - 1:800

8 m³/h - 0.03 - 0.125%

0.35 - 8 bar

5 - 116 psi

