

7 GPM: D128R

PRODUCT DESCRIPTION

The easy to install water-powered Dosatron D128R-7 GPM is the original flat top medicator used in animal health. It is well known for its dependability and ease of use with a flow of up to 7 GPM and ratio range settings of 1:128, 1:100, and 1:200.

PRODUCT SPECIFICATIONS

Dilution Range:	1:200/1:128/1:100 (0.5% to 1%) Pre-set at 1:128
Water Flow Range:	0.09 to 7 GPM
Operating Pressure Range:	7 to 70 PSI
Available Housing Materials:	Polyacetal (Standard Blue)
Dimensions:	13" x 6 1/4"
Weight:	4 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104 ⁰ F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and quick start guide
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor



MAINTENANCE KITS

Rebuild Kit (Part #: MKD128R) - Extends the life of your unit

Call 800-523-8499 to order the Dosatron for your specific application




DOSATRON®

An Ingersoll Rand Business

7 GPM: D128R

Basic Installation

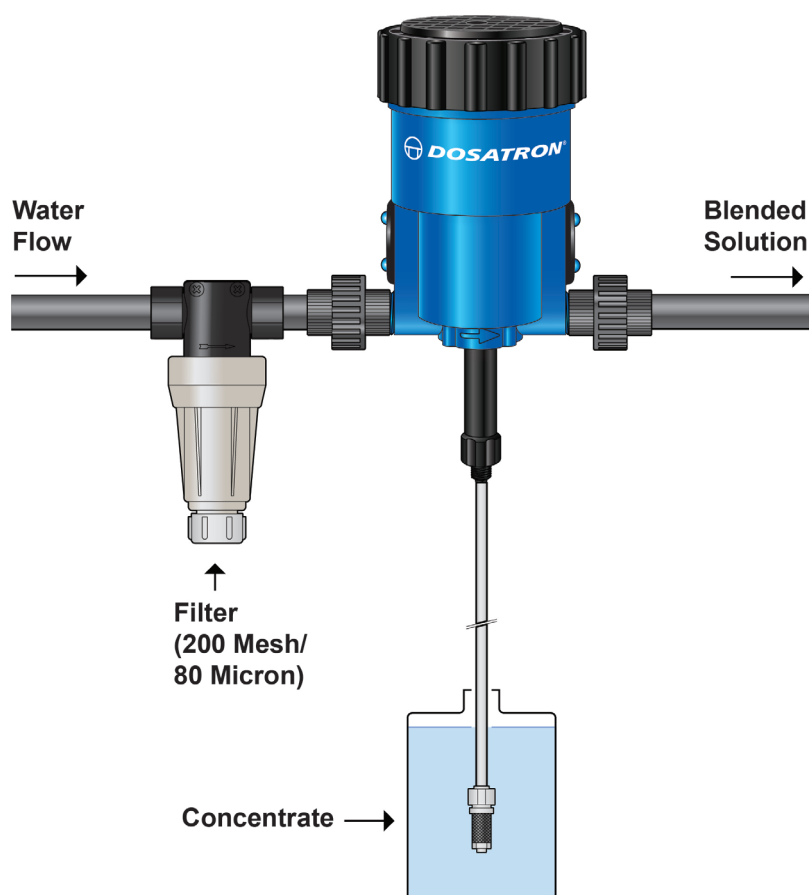

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatron.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.